


#### FEATURES

- Glass passivated device
- Ideal for surface mouted applications
- Low leakage current
- Metallurgically bonded construction
- High temperature soldering:  
250 /10 seconds at terminals

#### MECHANICAL DATA

Case:JEDEC SOD-123FL,molded plastic over passivated chip  
 Terminals:Solder Plated, solderable per MIL-STD-750, Method 2026  
 Polarity: Color band denotes cathode end  
 Weight: 0.006 ounces, 0.02 gram  
 Mounting position: Any

#### SOD-123FL

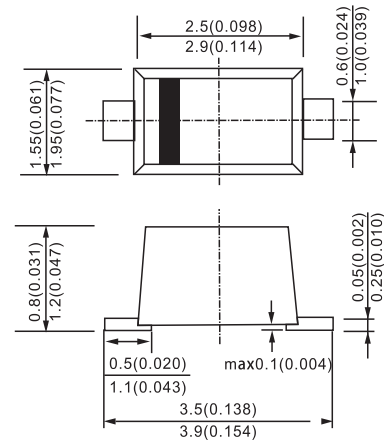

Dimensions in millimeters

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


		S07B	S07D	S07G	S07J	S07M	UNITS
Device marking code		B0	D0	G0	J0	M0	
Maximum recurrent peak reverse voltage	$V_{RRM}$	100	200	400	600	1000	V
Maximum RMS voltage	$V_{RMS}$	70	140	280	420	700	V
Maximum DC blocking voltage	$V_{DC}$	100	200	400	600	1000	V
Maximum average forward rectified current $T_A=65$ (NOTE 1)	$I_{(AV)}$	0.7					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load $T_L=25$	$I_{FSM}$	25					A
Typical thermal resistance (NOTE 2)	$R_{j\theta A}$	180					K/W
Operating temperature range	$T_j$	- 55 --- + 150					
Storage temperature range	$T_{STG}$	- 55 --- + 150					

NOTES:1.Averaged over any 20 ms period.


2. Thermal resistance junction to ambient, 6.0 mm<sup>2</sup> copper pads to each terminal.

### RATINGS AND CHARACTERISTIC CURVES S07B THRU S07M


**FIG.1 – TYPICAL FORWARD CHARACTERISTIC**

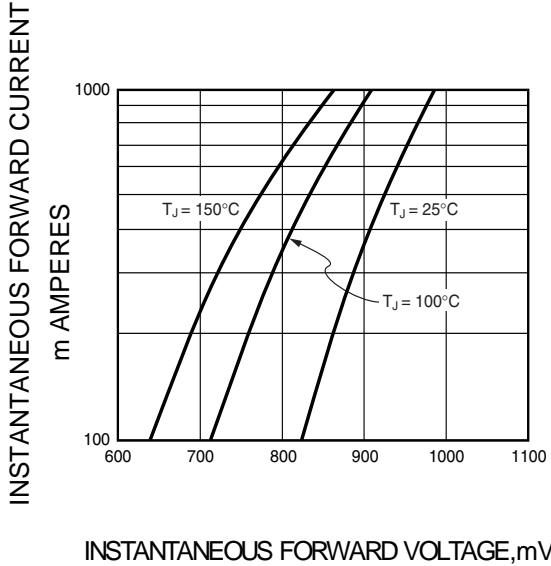

**FIG.2 – TYPICAL JUNCTION CAPACITANCE**

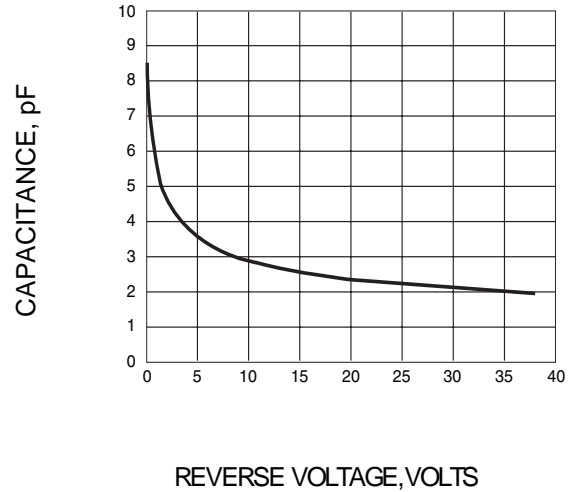

**FIG.3 – TYPICAL INSTANTANEOUS REVERSE CHARACTERISTICS**

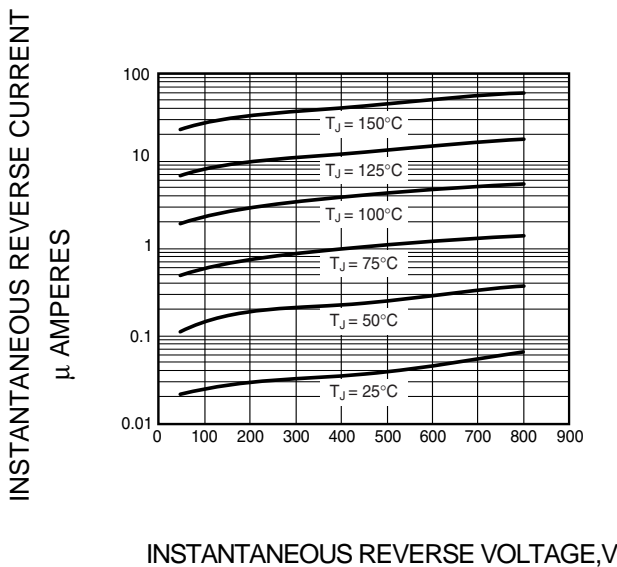

**FIG.4 – FORWARD DERATING CURVE**

