

**FEATURES**

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultrafast recovery time for high efficiency
- Excellent high temperature switching
- Soft recovery characteristics
- Glass passivated junction
- High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

**Mechanical Data**

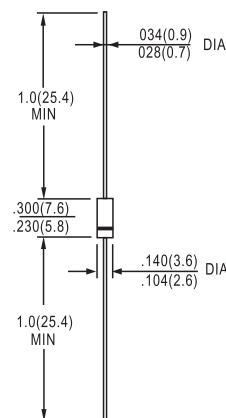
**Case:** JEDEC DO-204AC molded plastic body over passivated chip

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.015 ounce, 0.4 gram



Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS****Maximum Ratings & Thermal Characteristics**

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	SBYV27-50	SBYV27-100	SBYV27-150	SBYV27-200	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	150	200	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	105	140	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	150	200	V
Minimum reverse breakdown voltage at 100µA	V <sub>BR</sub>	55	110	165	220	V
Maximum average forward rectified current 0.375" (9.5mm) lead lengths at T <sub>L</sub> = 85°C	I <sub>F(AV)</sub>	2.0				A
Peak forward surge current 10 ms single half sine-wave superimposed on rated load (JEDEC Method) at T <sub>J</sub> = 150°C	I <sub>FSM</sub>	50				A
Typical thermal resistance (NOTE 1)	R <sub>θJA</sub>	45				°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150°C				°C

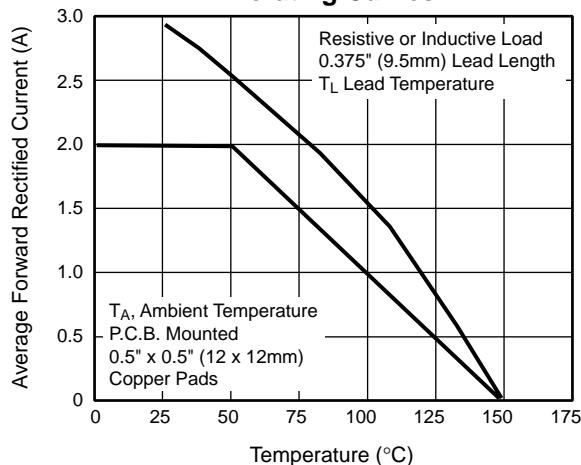
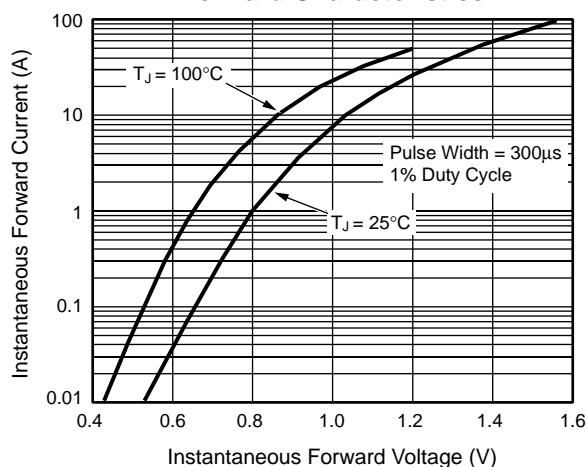
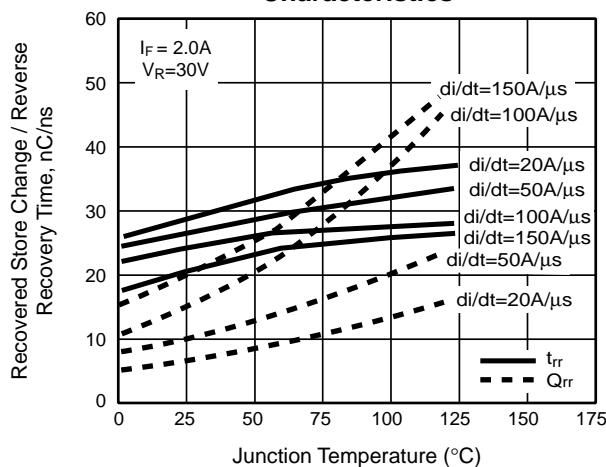
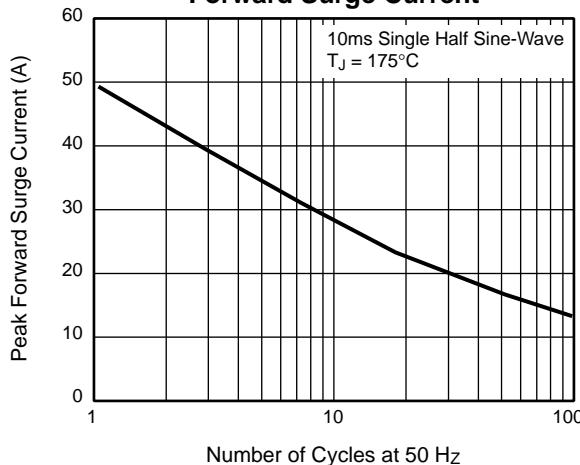
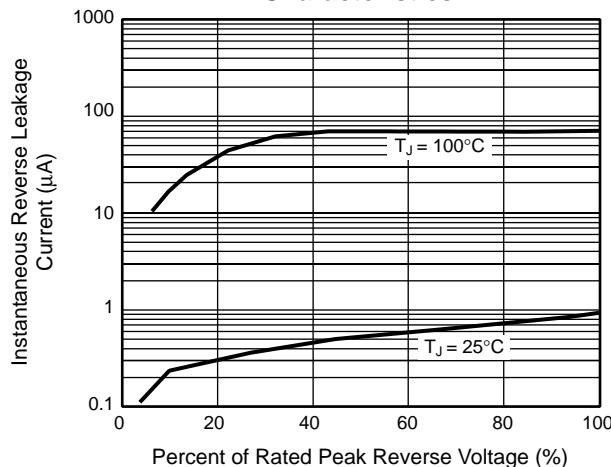
**Electrical Characteristics**

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	SBYV27-50	SBYV27-100	SBYV27-150	SBYV27-200	Units
Maximum instantaneous forward voltage at 3.0A (NOTE 2) T <sub>J</sub> = 25°C T <sub>J</sub> = 150°C	V <sub>F</sub>	1.07 0.88				V
Maximum DC reverse current at rated DC blocking voltage T <sub>A</sub> = 25°C T <sub>A</sub> = 100°C	I <sub>R</sub>	5.0 200				µA
Maximum reverse recovery time at I <sub>F</sub> =0.5A, I <sub>R</sub> =1.0A, I <sub>rr</sub> =0.25A	t <sub>rr</sub>	15				ns
Typical junction capacitance at 4.0V, 1MHz	C <sub>J</sub>	15				pF

**Notes:**

- (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length
- (2) Pulse test: 300µs pulse width, duty cycle ≤ 2%

**Fig. 1 – Maximum Forward Current Derating Curves****Fig. 3 – Typical Instantaneous Forward Characteristics****Fig. 5 – Reverse Switching Characteristics****Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current****Fig. 4 – Typical Reverse Leakage Characteristics****Fig. 6 – Typical Junction Capacitance**