


## FEATURES

- High current capability
- High surge current capability
- High reliability
- High efficiency
- Low power loss
- Low forward voltage drop
- Low cost

## MECHANICAL DATA

Case : DO-41 Molded plastic  
 Epoxy : UL94V-O rate flame retardant  
 Lead : Axial lead solderable per MIL-STD-202,  
 Method 208 guaranteed  
 Polarity : Color band denotes cathode end  
 Mounting position : Any  
 Weight : 0.339 gram

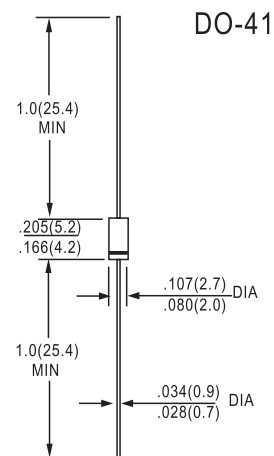

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

### • Absolute maximum ratings


Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	$V_{RRM}$		60	V
Average forward current	$I_{F(AV)}$	Resistive load $T_I=111^{\circ}\text{C}$	1.0	A
Surge current	$I_{FSM}$	Sine wave 10ms	30	A
Operating junction temperature	$T_j$		-40 to +150	$^{\circ}\text{C}$
Storage temperature	$T_{stg}$		-40 to +150	$^{\circ}\text{C}$

### • Electrical characteristics ( $T_a=25^{\circ}\text{C}$ Unless otherwise specified)


Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	$V_{FM}$	$I_{FM}=1\text{A}$	0.58	V
Reverse current	$I_{RRM}$	$V_R=V_{RRM}$	2.0	mA

**RATINGS AND CHARACTERISTIC CURVES ERA83-006**


**FIG.1 - FORWARD CURRENT DERATING CURVE**

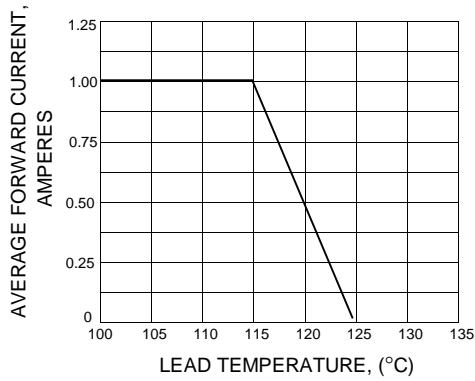

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

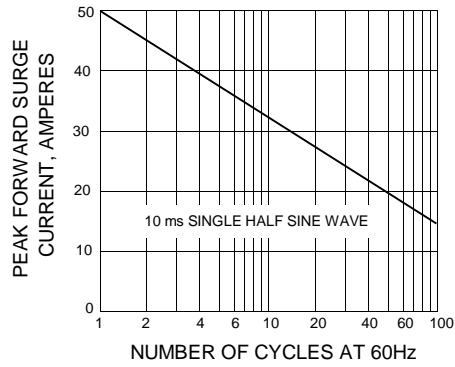

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

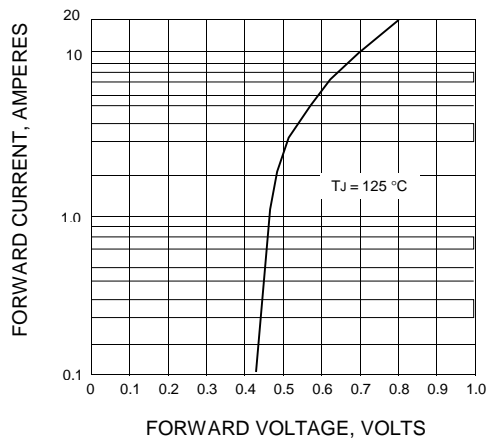

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

